


Powerful H.264 Networking Standalone DVR

KG-SH330 Standalone DVR

Feature

- Embedded system design, provide reliable system
- H.264 video compress with configurable quality
- Support sixplex operation – Live, Record, Playback, Backup, Control, Remote access.
- Preview Up to 30 (NTSC) / 25 (PAL) IPS per display channel
- Record – Full-D1: up to 60/50 IPS, Half-D1: up to 120/100 IPS, CIF: up to 240/200 IPS.
- Perfect Anti-vibration design with ruggedized mounting rack to ensure HDD data safety.
- Support large storage with up to 4 HDDs.
- Backup: USB 2.0 devices, including DVD+RW, pen drive.
- Support VGA display and I/R remote control
- Support CMS (Central Management System)
- Support audio recording function
- Remote access through mobile phone ,PDA , IE
- Support POS, GPS, PTZ, keyboard control via RS-232 and RS-485.
- Optional IEEE 1394 connector for external HDD/RAID extension

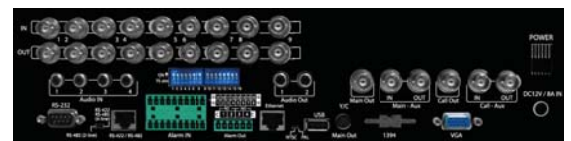

Rear View (9CH)

Specification

Model	KG-SH330
System	
OS	Embedded Linux 2.6
Operation	Sixplex operation – Live, Record, Playback, Backup, Control, Remote
Format	NTSC/EIA or PAL/CCIR
Certification	CE, FCC etc.
Video	
Input	9ch, BNC
Output	1.0Vp-p, 75ohm, BNC (Main / Call monitor) , S-video, BNC x 9 video looping out, VGA D-sub 15 pin output
Audio	
Audio Input	RCA 4 CH
Audio Output	RCA 2 CH
Monitor	
Display Channel	1/4/7/9
Digital Zoom	x 2, x4
Sequence Display	Available
Display Resolution	NTSC:720(H)x 480(V) ; PAL : 720(H) x 576(V)
Display Rate	Up to 30 (NTSC) / 25 (PAL) IPS per display channel
Record	
Compression	H.264
Recording rate (IPS)	NTSC:60IPS/720x480, 120IPS/720x240, 240IPS/360x240 PAL : 50IPS/720x576, 100IPS/720x288, 200IPS/360x288
Recording Mode	Manual / Alarm / Motion / Schedule
Playback Mode	Date / Time, Camera, Motion, Alarm
Pre-record time	0-60 seconds
Post-record time	0-60 minutes

Network Function	
Ethernet	RJ-45 x1
Protocol	TCP/IP, HTTP, PPPoE, DHCP, DDNS,
Remote Access	IE / CMS2000
Remote stations	PDA, PC, Mobile Phone
Control	
IR Remote	Yes
RS-232	1 x D-type female connector for PTZ, POS, GPS
RS-485 / 422	1 x RJ-45 for keyboard / PTZ control
Other Function	
Motion Detect	Configurable detection and sensitivity
Alarm Function	16 alarm In / 4 relay Out
Back-Up	USB 2.0 device x 2
Storage	Internal, 3.5" SATA type HDD x2 ; 3.5" IDE HDD x 2
Watch Dog	Yes
Security	3 level password protection, up to 18 accounts
Mechanical	
Power Supply	DC 12V@8A
Weight	3.4 kg
Dimension	280(D) x 355(W) x 90(H)mm
Operating	0°C ~ +45°C