

## Linksys Router : Firmware 1

**This setting applies to Linksys router.**


### Step 1:

- : Open Internet Explorer and type **192.168.1.1**(default) into the address bar. (refer router quick guide manual)
- : Fill in Username & Password.(default: **admin**, password: **admin**)
- : Click "**OK**" to login.



### Step 2:

- : Select "**Applications & Gaming**" tab.
- : Click "**Port Range Forwarding**".
- : Fill in application name. (eg: CCTV)
- : Key in your port number into the Start and End columns.
- : Protocol keep setting as TCP.
- : IP Address (Your CCTV Server or IP Camera's IP Address)
- : Tick "**Enable**".
- : Click "**Save Settings**".

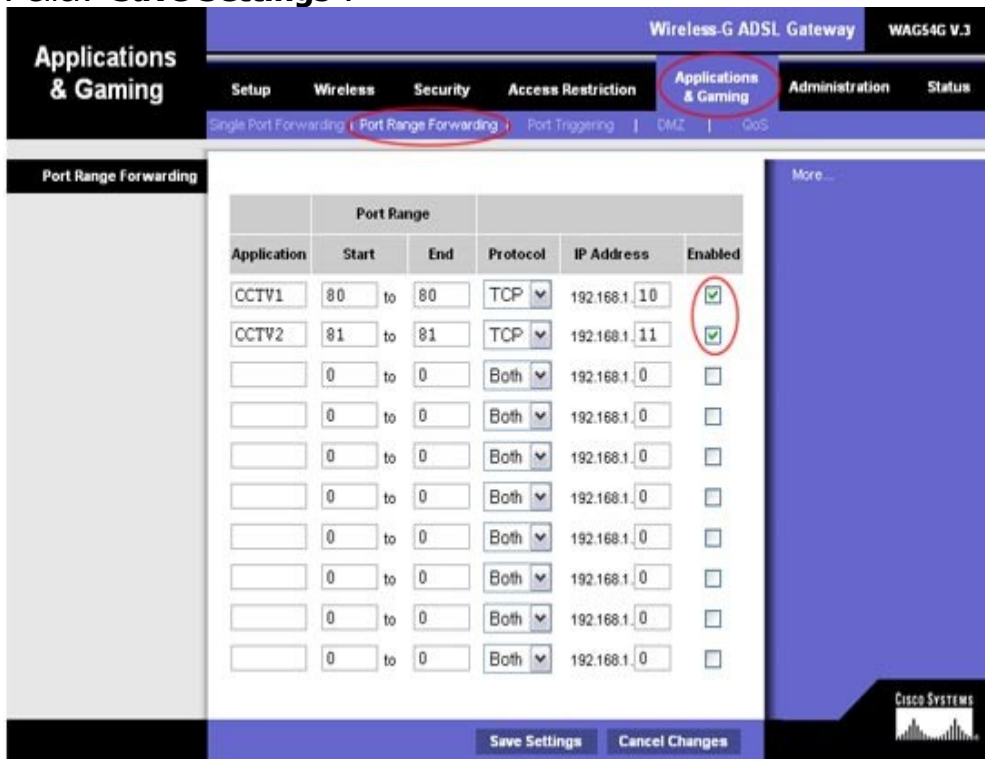

Wireless-G ADSL Gateway WAG54G V.3

Applications & Gaming

Setup Wireless Security Access Restriction Applications & Gaming Administration Status

Single Port Forwarding Port Range Forwarding Port Triggering DMZ QoS

Port Range Forwarding

Application	Port Range		Protocol	IP Address	Enabled
	Start	End			
CCTV1	80	to 80	TCP	192.168.1.10	<input checked="" type="checkbox"/>
CCTV2	81	to 81	TCP	192.168.1.11	<input checked="" type="checkbox"/>
	0	to 0	Both	192.168.1.0	<input type="checkbox"/>
	0	to 0	Both	192.168.1.0	<input type="checkbox"/>
	0	to 0	Both	192.168.1.0	<input type="checkbox"/>
	0	to 0	Both	192.168.1.0	<input type="checkbox"/>
	0	to 0	Both	192.168.1.0	<input type="checkbox"/>
	0	to 0	Both	192.168.1.0	<input type="checkbox"/>
	0	to 0	Both	192.168.1.0	<input type="checkbox"/>
	0	to 0	Both	192.168.1.0	<input type="checkbox"/>

Save Settings Cancel Changes

CISCO SYSTEMS

# Saved dialog will display as below.

**Settings are successful.**

Continue