

## Aztech Router : Firmware 1

**This setting applies to Aztech 600E/EU(old), or older model router.**

### Step 1:

- : Open Internet Explorer and type **192.168.1.1**(default) into the address bar.
- : Fill in Username & Password.(default: **admin, admin**)
- : Click "**Log In**".

Modem Access	
Modem authentication is required. This is different from your ISP username/password.	
Username:	admin
Password:	
Log In	

### Step 2:

- : Click "**Advanced**" on the upper tab.
- : Select "**LAN Clients**" on the left panel.

Advanced	
The Advanced section lets you configure advanced features like F DNS, IGMP, MAC Filters, and LAN clients.	
Advanced Features	
UPnP	Select to configure UPnP for differ
SNMP Management	Select to configure snmp manage
DNS Proxy Server	Select to configure DNS Proxy Ser
IP QoS	Select to configure IP QoS for dff
LAN Clients	Select to configure LAN Clients.


### Step 3:

- : New IP Address -> Your CCTV Server or IP Camera's IP Address
- : Hostname -> CCTV
- : After key in both, click "**Apply**" below.
- : after click Apply, you will see your rules on the list below.
- : Select "**Port Forwarding**" on the left panel.

LAN Clients			
New IP Address:	192.168.0.10		
Hostname:	CCTV		
Static Addresses			
Delete	IP Address	Hostname	Type
<input type="checkbox"/>	192.168.0.252	BL-C10	Static
<input type="checkbox"/>	192.168.0.253	BL-C1	Static
<input type="checkbox"/>	192.168.0.200	Support	Static
<input type="checkbox"/>	192.168.0.163	eVerMedia	Static
Dynamic Addresses			
Reserve	IP Address	Hostname	Type
Apply Cancel			

#### Step 4:

:Select "User", then click "New".

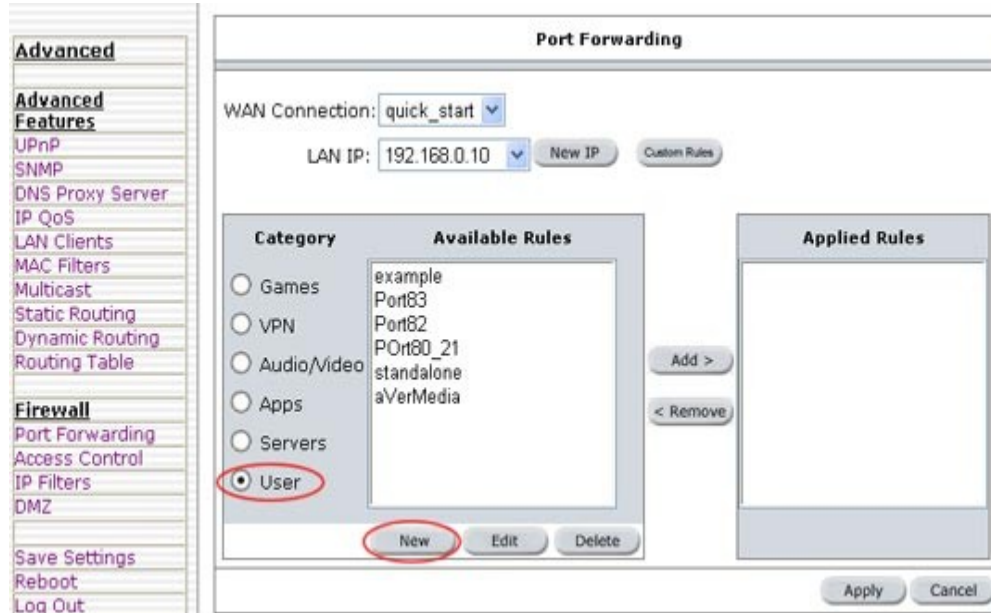

#### Step 5:

: Rule Name -> CCTV


: Protocol -> Keep setting as TCP

: Key in your port into Port Start, Port End and Port Map.

: Click "Apply" to confirm the port entry.

: You can add more than 1 ports on the same rule.

: If done entry the port, please go back by select "**Port Forwarding**".

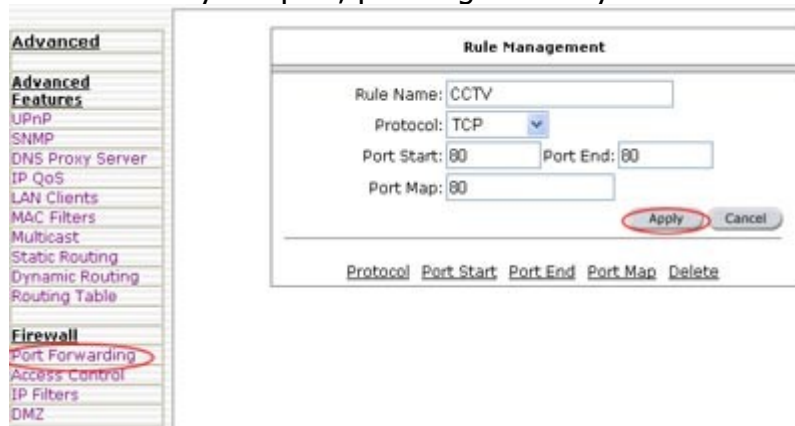


#### Step 6:

: Ensure that the LAN IP is the CCTV Server or IP Camera's IP Address you added before.

: Select "User", highlight "CCTV", then click "Add". You'll see the "CCTV" go to "**Applied Rules**".

: Click "**Apply**" to confirm the rules.

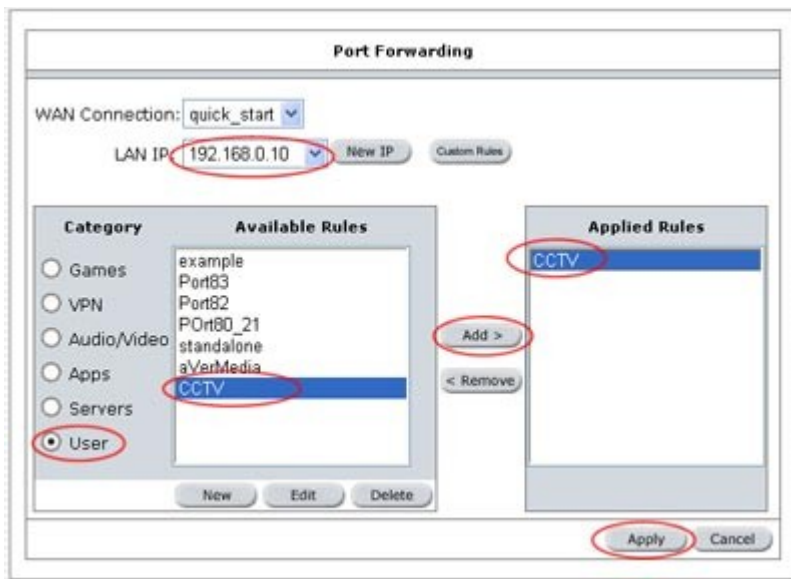

### Step 7:

: Please remember to save your settings by clicking "**Save Settings**".

